


## Datasheet of Balancer 77000872

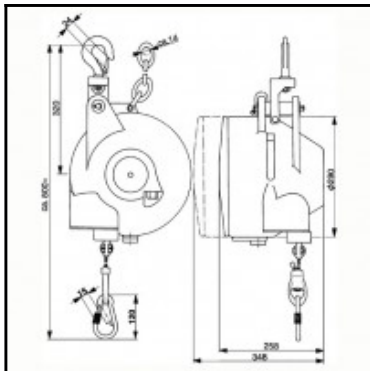

### Description

Balancer, payload range of 150 to 170 kg, cable length 3 m, working stroke infinitely variable adjustable

Absolute precision and safety due to high quality. High operating safety due to high quality. The hanging is positionable and done through a freely turnable and traversable safety hook. The casing, the casing lid and the cable drum are made of high-strength aluminium sand casting. High-strength steel cable with elastic cable stop buffer and carabiner for hanging the load. The cable length is infinitely variable adjustable through a cable lock – with cable length limit. Infinitely variable load setting through adjusting screw. Full encapsulated special mainspring. The double ball bearing mounted cable drum is blockable with an integrated locking. Patented over-twist protection of the suspension spring. Longer cables available on demand.

### Details

Series:	7251
Series long:	7251
Payload range in kg:	150 - 170
Cable length in m:	3
Material casing:	Aluminium sand casting
Additional information:	With 2 springs
Suspension:	Freely turnable and traversable safety hook
Load attachment:	Screwing carabiner
Load setting:	Through adjusting screw
Cable stop:	Yes, shock absorbing and adjustable
Locking:	No
Spring fracture protection:	Yes
Fall protection:	Existing, according to DIN 15112
Weight in kg:	46

### Dimensions