


## Datasheet of Balancer 77000903

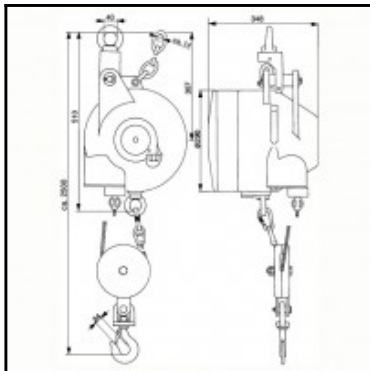

### Description

Balancer, payload range of 200 to 225 kg, cable length 1,5 m, working stroke infinitely variable adjustable

Balancer for extremely heavy payloads ? solution on the highest level. High operating safety and durability combined with a very easy maintenance. Worldwide unique model series. The hanging is positionable and done through a traversable safety hook. The casing, the casing lid and the cable drum are made of high-strength aluminium sand casting. High-strength steel cable with elastic cable stop buffer and safety hook with security catch on an encapsulated pulley for hanging the load. The cable length is infinitely variable adjustable through a cable lock – with cable length limit. Infinitely variable load setting through adjusting screw. Full encapsulated special mainspring. The double ball bearing mounted cable drum is blockable with an integrated locking. Patented over-twist protection of the suspension spring. Longer cables available on demand.

### Details

|                             |   |
|-----------------------------|---|
| Series:                     | 7261  |
| Series long:                | 7261  |
| Payload range in kg:        | 200 - 225   |
| Cable length in m:          | 1,5   |
| Material casing:            | Aluminium sand casting                                    |
| Suspension:                 | Traversable and positionable                              |
| Load attachment:            | Safety hook with security catch on an encapsulated pulley |
| Load setting:               | Through adjusting screw                                   |
| Cable stop:                 | Yes, shock absorbing and adjustable                       |
| Locking:                    | No  |
| Spring fracture protection: | Yes   |
| Fall protection:            | Existing, according to DIN 15112                          |
| Weight in kg:               | 49  |

### Dimensions