


## Datasheet of Balancer 77000906

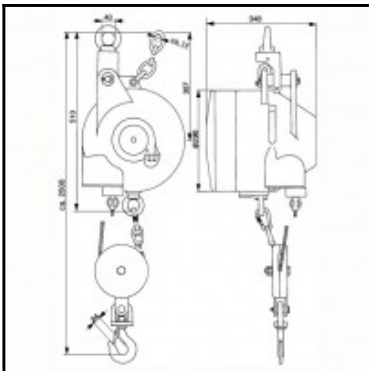

### Description

Balancer, payload range of 275 to 300 kg, cable length 1,5 m, working stroke infinitely variable adjustable

Balancer for extremely heavy payloads ? solution on the highest level. High operating safety and durability combined with a very easy maintenance. Worldwide unique model series. The hanging is positionable and done through a traversable safety hook. The casing, the casing lid and the cable drum are made of high-strength aluminium sand casting. High-strength steel cable with elastic cable stop buffer and safety hook with security catch on an encapsulated pulley for hanging the load. The cable length is infinitely variable adjustable through a cable lock – with cable length limit. Infinitely variable load setting through adjusting screw. Full encapsulated special mainspring. The double ball bearing mounted cable drum is blockable with an integrated locking. Patented over-twist protection of the suspension spring. Longer cables available on demand.

### Details

Series:	7261
Series long:	7261
Payload range in kg:	275 - 300
Cable length in m:	1,5
Material casing:	Aluminium sand casting
Suspension:	Traversable and positionable
Load attachment:	Safety hook with security catch on an encapsulated pulley
Load setting:	Through adjusting screw
Cable stop:	Yes, shock absorbing and adjustable
Locking:	No
Spring fracture protection:	Yes
Fall protection:	Existing, according to DIN 15112
Weight in kg:	55

### Dimensions