


Datasheet of Hose balancer 77000652

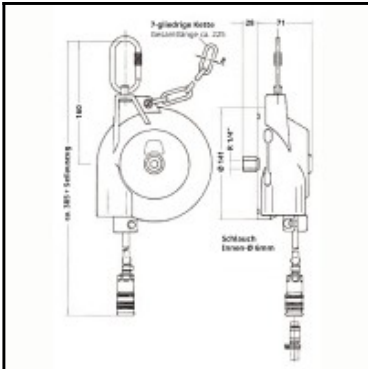

Description

Hose balancer, payload range 1,2 - 2,2 kg, cable length 0,8 m, with quick coupling and hose tail 6 mm, air connection R 1/4".

Hose balancer for industrial applications. Hanging with a turnable screwing carabiner. Casing and cable drum are made of shockproof and abrasion-resistant plastic, red-orange. Casing lid made of sheet steel, painted. High-strength and sturdy (damage-resistant) air hose with inner width of 6 mm and attached quick coupling. Air supply through R1/4" female thread on the casing. The working stroke can be infinitely variable shortened. High-strength riveted special mainspring. Longer hose available on demand. The hose stop buffer is infinitely variable adjustable. Maximum working pressure: 10 bar Air passage: 860 l/min at 6 bar.

Details

Series:	7223
Series long:	7223
Payload range in kg:	1,2 - 2,2
Cable length in m:	0,8
Material casing:	Shockproof and abrasion-resistant plastic
Additional information:	Air flow rate is identical in withdrawn and extended state of the hose.
Suspension:	Turnable and traversable screwing carabiner
Load setting:	by screwing mit Allen key
Cable stop:	Yes, shock absorbing and adjustable
Locking:	No
Connection (casing):	Female thread R 1/4"
Connection (hose):	Quick coupling and plug 6 mm
Maximum working pressure in bar:	10
max. inlet pressure:	10
Spring fracture protection:	No
Fall protection:	Existing, according to DIN 15112
Weight in kg:	1,3

Dimensions

Hose Inner diameter in mm:	6
----------------------------	---