


## Datasheet of 3100 04 00 Polymere-cartridge

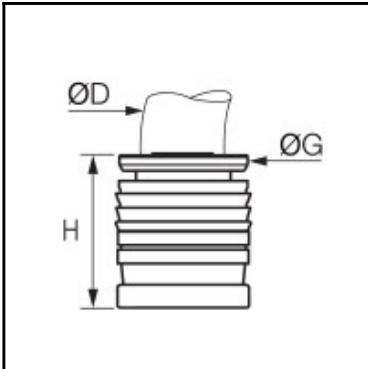

### Description

Carstick cartridges, Polymere-cartridge for compressed air applications Carstick®, Brass, 4 mm

In line connection of tubing to a threaded port within a customised assembly. The assembly block must include cavities into which the cartridge can be fitted. Pre-greased and protected seal prior to assembly. Self-centring of the cartridge within the cavity. Suitable for automatic processes. Complies RoHS and ISO 14743.

### Details

ØD:	4 mm
G:	8
G1:	11
H:	10
L:	554
Maximum working pressure in bar:	20
Material seal:	NBR
Material body:	Brass
Material toothed washer:	Stainless steel
min. temperature in °C:	-20
max. temperature in °C:	80
Vacuum resistance in mm Hg:	755
RoHS compliant:	Yes
Weight in kg:	0,001

### Dimensions

ØD:	4 mm
G:	8
G1:	11
H:	10
L:	554