


## Datasheet of 3109 08 17 Stud elbow

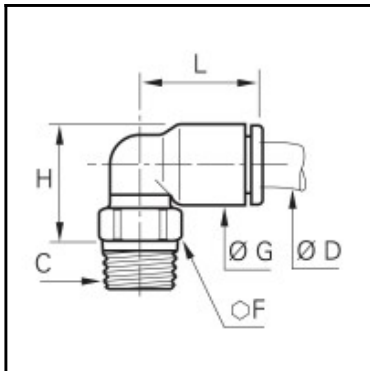

### Description

LF 3000 standard pneumatic, stud elbow, Engineered polymer, 8 mm - R3/8

Connection of tubing at 90° with a male thread. Tightened on the top of the fitting with a flat spanner or Allen key to facilitate assembly in tight spaces. solid construction, aesthetic and unobtrusive for a better connection. Precoated thread ensuring direct sealing and full air flow. Individual unit quality control and dating in order to guarantee quality and traceability. Complies RoHS and ISO 14743.

### Details

|                                  |                     |
|----------------------------------|---------------------|
| ØD:                              | 8 mm                |
| C:                               | R3/8"               |
| F:                               | 17                  |
| G:                               | 13,5                |
| H:                               | 18                  |
| L:                               | 23                  |
| Maximum working pressure in bar: | 20                  |
| Seal coating:                    | PTFE                |
| Material seal:                   | NBR                 |
| Material body:                   | Engineered polymer  |
| Material threaded fitting:       | Brass nickel plated |
| Material toothed washer:         | Stainless steel     |
| min. temperature in °C:          | -20                 |
| max. temperature in °C:          | 80                  |
| Vacuum resistance in mm Hg:      | 755                 |
| Special feature:                 | schwenkbar          |
| RoHS compliant:                  | Yes                 |
| Weight in kg:                    | 0,018               |

### Dimensions

|     |       |
|-----|-------|
| ØD: | 8 mm  |
| C:  | R3/8" |
| F:  | 17    |
| G:  | 13,5  |
| H:  | 18    |
| L:  | 23    |