


Datasheet of 3126 08 00 Plug

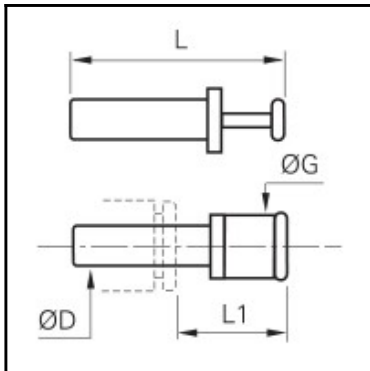

Description

LF 3000 standard pneumatic, Plug, Engineered polymer, 8 mm

Designed to plug unused push-in fittings.

Details

ØD:	8 mm
G:	10
L:	35
L1:	17,5
Maximum working pressure in bar:	20
Material body:	Engineered polymer
min. temperature in °C:	-20
max. temperature in °C:	80
Vacuum resistance in mm Hg:	755
RoHS compliant:	Yes
Weight in kg:	0,001

Dimensions

ØD:	8 mm
G:	10
L:	35
L1:	17,5