


## Datasheet of 3126 60 00 Plug

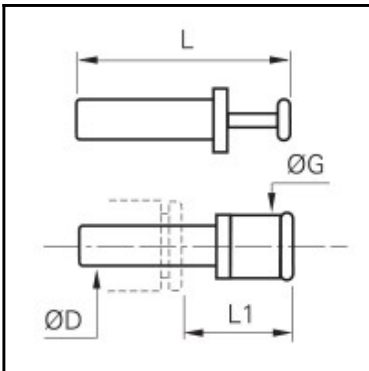

### Description

LF 3000 standard pneumatic, Plug, Engineered polymer, 3/8

Designed to plug unused push-in fittings.

### Details

ØD:	3/8"
G:	12
L:	42
L1:	22
Maximum working pressure in bar:	20
Material body:	Engineered polymer
min. temperature in °C:	-20
max. temperature in °C:	80
Vacuum resistance in mm Hg:	755
RoHS compliant:	Yes
Weight in kg:	0,002

### Dimensions

ØD:	3/8"
G:	12
L:	42
L1:	22