


Datasheet of 3129 14 17 Extended stud elbow

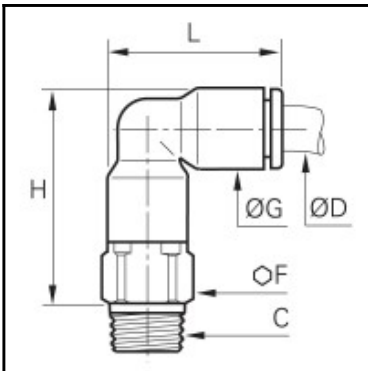

Description

LF 3000 standard pneumatic, Extended stud elbow, Engineered polymer, 14 mm - R3/8

Connection of tubing at a 90° angle. Height dimensions are designed to pass over a 3109 elbow. solid construction, aesthetic and unobtrusive for a better connection. Precoated thread ensuring direct sealing and full air flow. Individual unit quality control and dating in order to guarantee quality and traceability. Complies RoHS.

Details

ØD:	14 mm
C:	R3/8"
F:	21
G:	22
H:	51,5
L:	46,5
Maximum working pressure in bar:	20
Seal coating:	PTFE
Material seal:	NBR
Material body:	Engineered polymer
Material threaded fitting:	Brass nickel plated
Material toothed washer:	Stainless steel
min. temperature in °C:	-20
max. temperature in °C:	80
Vacuum resistance in mm Hg:	755
Special feature:	schwenkbar
RoHS compliant:	Yes
Weight in kg:	0,064

Dimensions

ØD:	14 mm
C:	R3/8"
F:	21
G:	22
H:	51,5
L:	46,5