


## Datasheet of 3693 04 10 L-stud coupling

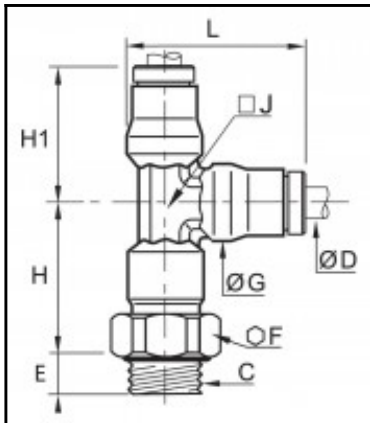

### Description

LF 3600 - Brass special - Industrie and food, L-stud coupling, Brass nickel plated chemical fda brass, 2 x 4 mm - G1/8

In line connection of 2 tubes at a 90° angle to a threaded port. Solid construction and compact design. Excellent resistance to corrosion. Individual unit quality control and dating in order to guarantee quality and traceability. Components meet FDA standard and 1935/2004/EC regulation and comply RoHS.

### Details

|                                  |                                        |
|----------------------------------|----------------------------------------|
| ØD:                              | 4 mm                                   |
| C:                               | G1/8"                                  |
| E:                               | 5,5                                    |
| F:                               | 13                                     |
| G:                               | 10                                     |
| H:                               | 20,5                                   |
| H1:                              | 18                                     |
| J:                               | 7                                      |
| L:                               | 23                                     |
| Maximum working pressure in bar: | 30                                     |
| Material seal ring:              | Brass nickel plated chemical fda brass |
| Material seal:                   | FKM                                    |
| Material body:                   | Brass nickel plated chemical fda brass |
| Material threaded fitting:       | Brass nickel plated chemical fda brass |
| Material release button:         | Brass nickel plated chemical fda brass |
| min. temperature in °C:          | -20                                    |
| max. temperature in °C:          | 150                                    |
| Vacuum resistance in mm Hg:      | 755                                    |
| Special feature:                 | schwenkbar                             |
| RoHS compliant:                  | Yes                                    |
| Weight in kg:                    | 0,021                                  |

### Dimensions

|     |       |
|-----|-------|
| ØD: | 4 mm  |
| C:  | G1/8" |
| E:  | 5,5   |
| F:  | 13    |
| G:  | 10    |
| H:  | 20,5  |
| H1: | 18    |
| J:  | 7     |
| L:  | 23    |