


Datasheet of 3693 06 13 L-stud coupling

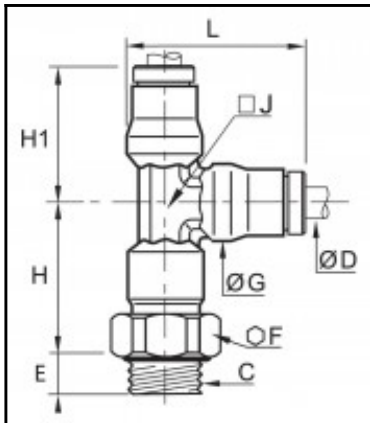

Description

LF 3600 - Brass special - Industrie and food, L-stud coupling, Brass nickel plated chemical fda brass, 2 x 6 mm - G1/4

In line connection of 2 tubes at a 90° angle to a threaded port. Solid construction and compact design. Excellent resistance to corrosion. Individual unit quality control and dating in order to guarantee quality and traceability. Components meet FDA standard and 1935/2004/EC regulation and comply RoHS.

Details

ØD:	6 mm
C:	G1/4"
E:	6,5
F:	16
G:	12
H:	24,5
H1:	21,5
J:	8
L:	28
Maximum working pressure in bar:	30
Material seal ring:	Brass nickel plated chemical fda brass
Material seal:	FKM
Material body:	Brass nickel plated chemical fda brass
Material threaded fitting:	Brass nickel plated chemical fda brass
Material release button:	Brass nickel plated chemical fda brass
min. temperature in °C:	-20
max. temperature in °C:	150
Vacuum resistance in mm Hg:	755
Special feature:	schwenkbar
RoHS compliant:	Yes
Weight in kg:	0,035

Dimensions

ØD:	6 mm
C:	G1/4"
E:	6,5
F:	16
G:	12
H:	24,5
H1:	21,5
J:	8
L:	28