


## Datasheet of 3899 04 19 Stud elbow

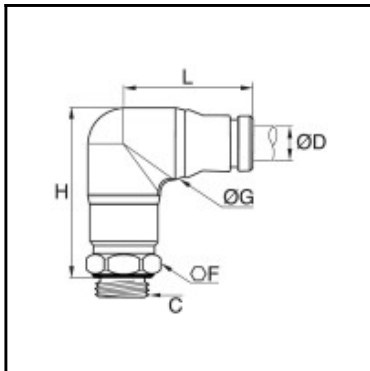

### Description

LF 3800 / LF 3900 - Stainless steel, stud elbow, Stainless steel 316L, 4 mm - M5x0,8

Connection of tubing at a 90° angle to a threaded port.

- materials: Stainless steel, sealings: FKM.
- stainless steel components and FKM seals for use in aggressive environments
- strong construction and compact
- hygienic design aimed at reducing retention zones for safe and easy cleaning ( $Ra < 0,8$  surface)
- permitting permanent contact with foodstuffs
- individual unit quality control and dating in order to guarantee quality and traceability
- materials conforming to FDA and 1934/2004 CE standards

### Details

ØD:	4 mm
C:	M5x0,8
F:	10
G:	10
H:	26
L:	18
Maximum working pressure in bar:	20
Material seal ring:	Stainless steel 316l
Material seal:	FKM
Material body:	Stainless steel 316l
Material threaded fitting:	Stainless steel 316l
Material release button:	Stainless steel 303
min. temperature in °C:	-20
max. temperature in °C:	120
Special feature:	schwenkbar
RoHS compliant:	Yes
Weight in kg:	0,02

### Dimensions

ØD:	4 mm
C:	M5x0,8
F:	10
G:	10
H:	26
L:	18