


Datasheet of 6114 04 56 Male stud coupling

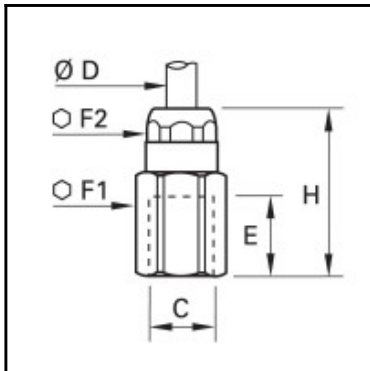

Description

LF 6100 - Lubrication and vacuum systems, male stud coupling, Brass, 4 mm - M8x1

In line connection of tubing to a threaded port. It is mounted from the outside. Very solid construction and sealing of tube by 2 O rings. manual connection and disconnection with a flat spanner to secure gripping of tube. Individual unit quality control and dating in order to guarantee quality and traceability. Complies RoHS.

Details

ØD:	4 mm
C:	M8x1
E:	8
F1:	13
F2:	11
H:	25,5
Maximum working pressure in bar:	60
Material seal:	NBR
Material body:	Brass
Material release button:	Brass
min. temperature in °C:	-40
max. temperature in °C:	120
RoHS compliant:	Yes
Weight in kg:	0,021

Dimensions

ØD:	4 mm
C:	M8x1
E:	8
F1:	13
F2:	11
H:	25,5