
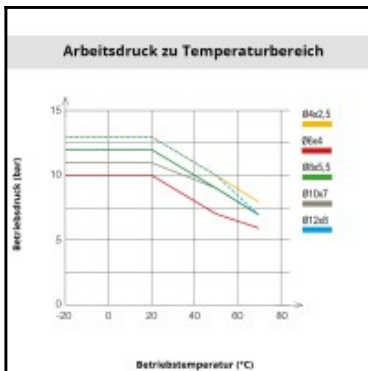


Datasheet of 1025U06K02 Polyurethane polyether hose

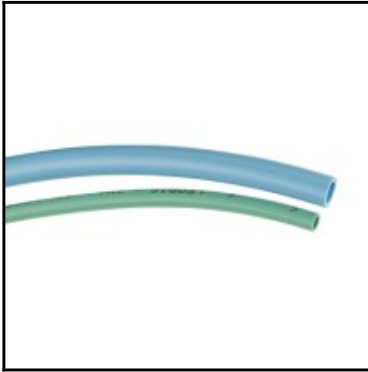

Description

Polyurethane polyether tubing, anti-spark, outer diameter 6 mm, inner diameter 4 mm, green, length 25 m

Used for welding applications. Single layer, push-in connection with LF 3600 fittings.

Details

Colour:	Green
Bend radius:	15
Outer diameter:	6 mm
Inner diameter:	4 mm
Hose length:	25 m
min. temperature in °C:	-20
max. temperature in °C:	70
Material:	PUER - UL94
RoHS compliant:	Yes
Weight in kg:	0,574

Dimensions

Bend radius:	15
Outer diameter:	6 mm
Inner diameter:	4,0 mm
Inner diameter:	4 mm