
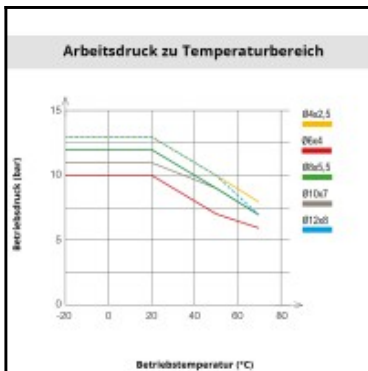


Datasheet of 1025U08K01 Polyurethane polyether hose

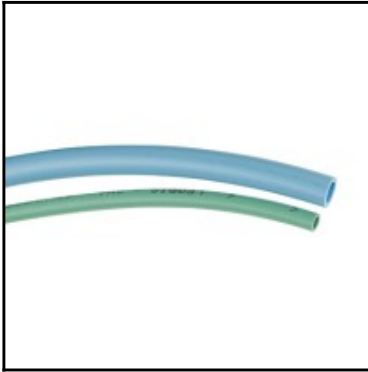

Description

Polyurethane polyether tubing, anti-spark, outer diameter 8 mm, inner diameter 5,5 mm, black, length 25 m

Used for welding applications. Single layer, push-in connection with LF 3600 fittings.

Details

Colour:	black
Bend radius:	20
Outer diameter:	8 mm
Inner diameter:	5,5 mm
Hose length:	25 m
min. temperature in °C:	-20
max. temperature in °C:	70
Material:	PUER - UL94
RoHS compliant:	Yes
Weight in kg:	0,862

Dimensions

Bend radius:	20
Outer diameter:	8 mm
Inner diameter:	5,5 mm
Inner diameter:	5,5 mm