


## Datasheet of 1025U08R08 Straight polyurethane polyether hose

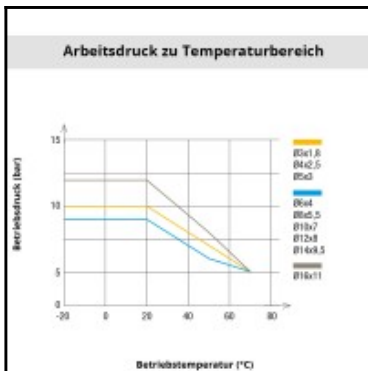

### Description

Flexible polyurethane polyether tubing, outer diameter 8 mm, inner diameter 5,5 mm, transparent, length 25 m

Resistant to humidity. Used for compact installations requiring a small bend radius and high flexibility. Excellent resistance to abrasion. Wide range of colours for easy identification of circuits.

### Details

|                         |             |
|-------------------------|-------------|
| Colour:                 | transparent |
| Bend radius:            | 20          |
| Outer diameter:         | 8 mm        |
| Inner diameter:         | 5,5 mm      |
| Hose length:            | 25 m        |
| min. temperature in °C: | -15         |
| max. temperature in °C: | 70          |
| Material:               | PUER        |
| RoHS compliant:         | Yes         |
| Weight in kg:           | 0,801       |

### Dimensions

|                 |        |
|-----------------|--------|
| Bend radius:    | 20     |
| Outer diameter: | 8 mm   |
| Inner diameter: | 5,5 mm |
| Inner diameter: | 5,5 mm |