


## Datasheet of 1050T10P12 Fluoropolymer hose (PFA)

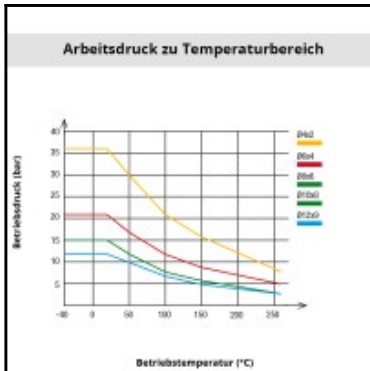

### Description

Fluoropolymer tubing (PFA), outer diameter 10 mm, inner diameter 8 mm, crystal green, length 50 m

Our range of PFA tubing covers a broad range of working temperatures, from cryogenic to extremely hot (+260°C) and of pressures (up to 35 bar) and combines transparency with the lowest gas and fluid permeability.

This tubing improves system security and prevents the risks of fluid and gas leaks while facilitating visual inspection of contaminants or flow disruption.

**The diameters 10 and 12 mm in coloured versions are available upon request only.**

### Details

Colour:	Crystal-Green
Bend radius:	95
Outer diameter:	10 mm
Inner diameter:	8 mm
Hose length:	50 m
min. temperature in °C:	-196
max. temperature in °C:	260
RoHS compliant:	Yes
Weight in kg:	3,615

### Dimensions

Bend radius:	95
Outer diameter:	10 mm
Inner diameter:	8,0 mm
Inner diameter:	8 mm