

## 25SFKO08RXX Plug with hose nut




Plug straight-through, with hose nut 6 x 8 mm, nominal diameter 7,8, <35 bar, stainless steel AISI 303



### Product description

Universal industrial coupling with standard European profile for use with gaseous, liquid and aggressive medio. Coupling system with single-hand operation. UltraFlo valve for optimum flow and low pressure drop. The series stands out for its robust design and long service life even with the harshest use. The collar design minimises damage to the valve body.

### More images

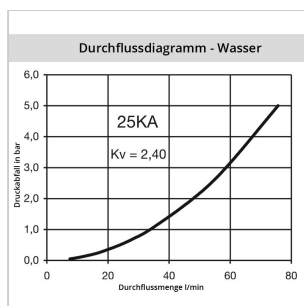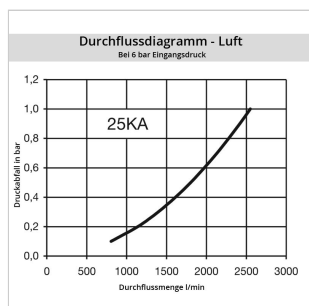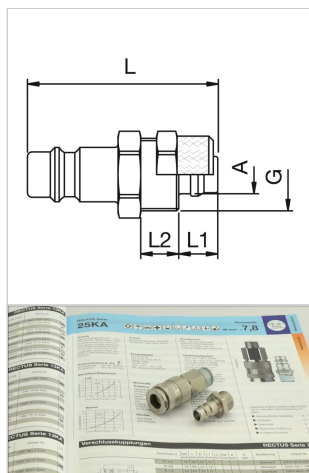

## Product properties

|                                          |                                                                                                          |
|------------------------------------------|----------------------------------------------------------------------------------------------------------|
| Shut-off                                 | Plug Straight-Through                                                                                    |
| Connection                               | with tube nut 6 x 8 mm                                                                                   |
| Connection description                   | with tube nut 6 x 8 mm                                                                                   |
| Connection type                          | Connection nut                                                                                           |
| Suitable breath / respiratory protection | No                                                                                                       |
| Seal                                     | Without Seal                                                                                             |
| Working pressure                         | 35 bar maximum static working pressure with safety factor 4 to 1.                                        |
| Pressure eliminator                      | No                                                                                                       |
| Single-hand operation                    | Yes                                                                                                      |
| Self-venting coupling                    | No                                                                                                       |
| Flat-sealing                             | No                                                                                                       |
| Mould coupling                           | No                                                                                                       |
| Weight in kg                             | 0,0162                                                                                                   |
| Hydraulics                               | No                                                                                                       |
| Compatibility                            | RECTUS 26 European standard profiles                                                                     |
| Ball locking                             | No                                                                                                       |
| Material                                 | stainless steel AISI 303                                                                                 |
| Material description                     | stainless steel AISI 303                                                                                 |
| Bore area in mm <sup>2</sup>             | 48                                                                                                       |
| Bore in mm                               | 7,8                                                                                                      |
| Surface                                  | blank finish                                                                                             |
| Pneumatics                               | Yes                                                                                                      |
| Series                                   | 25                                                                                                       |
| Series long                              | 25SF                                                                                                     |
| Safety locking system                    | No                                                                                                       |
| Standard product                         | No                                                                                                       |
| Pin lock                                 | No                                                                                                       |
| Working temperature                      | -20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) depending on the medium. |
| Ultra-FLO-valve                          | No                                                                                                       |
| Vacuum suitable                          | No                                                                                                       |
| Advantages                               | One-hand operation. Robust structure. UltraFlo valve.                                                    |
| Water-resistant                          | Yes                                                                                                      |
| Two-hand operation                       | No                                                                                                       |

## Dimensions

|              |          |
|--------------|----------|
| Connection A | 6 x 8 mm |
| D mm         | 12       |
| G mm         | M 12 x 1 |
| L mm         | 34       |
| L1 mm        | 7        |
| L2 mm        | 6        |