

26KATF09RVX Quick coupling with hose barb




Quick coupling single shut-off, hose barb 9mm (3/8), nominal diameter 7,2, <35 bar, stainless steel AISI 303, seal FKM



Product description

Universal stainless steel coupling with standard European profile. Version in AISI 303 stainless steel for corrosion-resistant applications, as an alternative to the UltraFlo versions. Coupling system with single-hand operation and standard valve. Small mass size.

More images

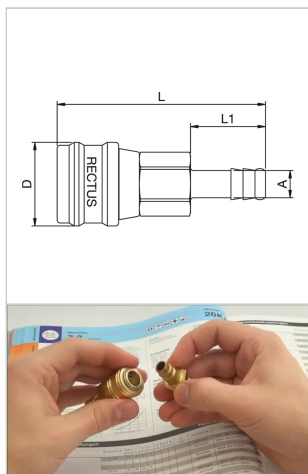

Product properties

Shut-off	Quick coupling Single Shut-Off
Connection	Hose barb 9mm LW(3/8")
Connection description	Hose barb 9mm LW(3/8")
Connection type	Hose barb
Suitable breath / respiratory protection	No
Seal	FKM
Seal description	Fluororubber
Working pressure	35 bar maximum static working pressure with safety factor 4 to 1.
Pressure eliminator	No
Single-hand operation	Yes
Self-venting coupling	No
Flat-sealing	No
Mould coupling	No
Weight in kg	0,1069
Hydraulics	No
Compatibility	RECTUS 25_x000D_ European standard profiles
Ball locking	No
Material	stainless steel AISI 303
Material description	stainless steel AISI 303
Bore area in mm ²	40
Bore in mm	7,2
Surface	blank finish
Pneumatics	Yes
Series	26
Series long	26KA
Safety locking system	No
Standard product	No
Pin lock	Yes
Working temperature	-20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) depending on the medium.
Ultra-FLO-valve	No
Vacuum suitable	Yes
Advantages	One-hand operation.
Water-resistant	No
Material connection	stainless steel AISI 303
Material seal	Viton®
Material sleeve	stainless steel AISI 303
Material spring snap ring	stainless steel AISI 301
Material balls/pins	Stainless steel AISI 316
Material valve	stainless steel AISI 303
Material valve body	stainless steel AISI 303
Two-hand operation	No

Dimensions

Connection A	9 mm
D mm	28
L mm	69,5
L1 mm	25
SW mm	19