

## 21SBIW13FVXR Plug color coded

Plug double shut-off, color coded (R = red), female thread G 1/4, nominal diameter 5, <10 bar, PVDF, seal FKM






Kein Foto vorhanden

### Product description

Mini industrial coupling in plastics POM and PVDF with the world's most popular profile in this nominal diameter. Above average flow performance for liquid and gaseous media.

### More images

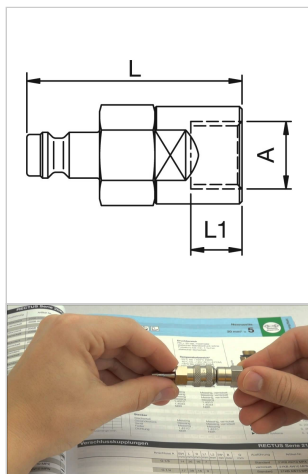

**Product properties**

|                                                 |                                                                                                         |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| <b>Shut-off</b>                                 | Plug Double Shut-Off                                                                                    |
| <b>Connection</b>                               | Female thread 1/4"                                                                                      |
| <b>Connection description</b>                   | Female pipe thread of Whitworth form ISO 228 1/4"                                                       |
| <b>Connection type</b>                          | Female thread                                                                                           |
| <b>Suitable breath / respiratory protection</b> | No                                                                                                      |
| <b>Seal</b>                                     | FKM                                                                                                     |
| <b>Seal description</b>                         | Fluororubber                                                                                            |
| <b>Working pressure</b>                         | 10 bar (POM, at 20°C), 8 bar (PVDF, at 20°C) maximum static working pressure with safety factor 4 to 1. |
| <b>Pressure eliminator</b>                      | No                                                                                                      |
| <b>Single-hand operation</b>                    | Yes                                                                                                     |
| <b>Self-venting coupling</b>                    | No                                                                                                      |
| <b>Flat-sealing</b>                             | No                                                                                                      |
| <b>Mould coupling</b>                           | No                                                                                                      |
| <b>Weight in kg</b>                             | 0,01                                                                                                    |
| <b>Hydraulics</b>                               | No                                                                                                      |
| <b>Coded</b>                                    | Yes                                                                                                     |
| <b>Coding</b>                                   | R = red                                                                                                 |
| <b>Ball locking</b>                             | No                                                                                                      |
| <b>Material</b>                                 | PVDF                                                                                                    |
| <b>Material description</b>                     | PVDF                                                                                                    |
| <b>Bore area in mm²</b>                         | 20                                                                                                      |
| <b>Bore in mm</b>                               | 5                                                                                                       |
| <b>Surface</b>                                  | blank finish                                                                                            |
| <b>Pneumatics</b>                               | Yes                                                                                                     |
| <b>Professional recommendation</b>              | Chemistry/Laboratory                                                                                    |
| <b>Series</b>                                   | 21                                                                                                      |
| <b>Series long</b>                              | 21SB                                                                                                    |
| <b>Safety locking system</b>                    | No                                                                                                      |
| <b>Standard product</b>                         | No                                                                                                      |
| <b>Pin lock</b>                                 | No                                                                                                      |
| <b>Working temperature</b>                      | -20°C up to +80°C (POM) -20°C up to +120°C (PVDF) depending on the medium.                              |
| <b>Ultra-FLO-valve</b>                          | No                                                                                                      |
| <b>Vacuum suitable</b>                          | Yes                                                                                                     |
| <b>Water-resistant</b>                          | No                                                                                                      |
| <b>Material seal</b>                            | Viton®                                                                                                  |
| <b>Material spring snap ring</b>                | Stainless steel AISI 316Ti                                                                              |
| <b>Material valve</b>                           | PVDF, white                                                                                             |
| <b>Two-hand operation</b>                       | No                                                                                                      |

**Dimensions**

|                     |       |
|---------------------|-------|
| <b>Connection A</b> | G 1/4 |
| <b>L mm</b>         | 42    |
| <b>L1 mm</b>        | 10    |
| <b>SW mm</b>        | 17    |