

## 21SFKO08EXX Plug with hose nut


Plug straight-through, with hose nut 6 x 8 mm, nominal diameter 5, <35 bar, stainless steel  
AISI 316 L



### Product description

Mini industrial coupling with the world's most popular profile in this nominal diameter. Above average flow performance for liquid and gaseous medio. Coupling system with single-hand operation. Small dimensions and large band width in materials and valve variants.

### More images

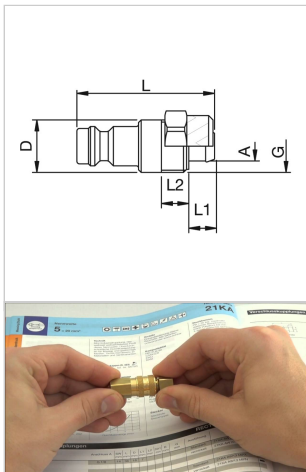

## Product properties

|                                          |                                                                                                          |
|------------------------------------------|----------------------------------------------------------------------------------------------------------|
| Shut-off                                 | Plug Straight-Through                                                                                    |
| Connection                               | with tube nut 6 x 8 mm                                                                                   |
| Connection description                   | with tube nut 6 x 8 mm                                                                                   |
| Connection type                          | Connection nut                                                                                           |
| Suitable breath / respiratory protection | No                                                                                                       |
| Seal                                     | Without Seal                                                                                             |
| Working pressure                         | 35 bar maximum static working pressure with safety factor 4 to 1.                                        |
| Pressure eliminator                      | No                                                                                                       |
| Single-hand operation                    | Yes                                                                                                      |
| Self-venting coupling                    | No                                                                                                       |
| Flat-sealing                             | No                                                                                                       |
| Mould coupling                           | No                                                                                                       |
| Weight in kg                             | 0,019                                                                                                    |
| Hydraulics                               | No                                                                                                       |
| Compatibility                            | RECTUS 90                                                                                                |
| Ball locking                             | No                                                                                                       |
| Material                                 | stainless steel AISI 316 L                                                                               |
| Material description                     | stainless steel 1.4404                                                                                   |
| Bore area in mm <sup>2</sup>             | 20                                                                                                       |
| Bore in mm                               | 5                                                                                                        |
| Surface                                  | blank finish                                                                                             |
| Pneumatics                               | Yes                                                                                                      |
| Series                                   | 21                                                                                                       |
| Series long                              | 21SF                                                                                                     |
| Safety locking system                    | No                                                                                                       |
| Standard product                         | No                                                                                                       |
| Pin lock                                 | No                                                                                                       |
| Working temperature                      | -20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) depending on the medium. |
| Ultra-FLO-valve                          | No                                                                                                       |
| Vacuum suitable                          | Yes                                                                                                      |
| Advantages                               | One-hand operation. Small dimensions. All variants are compatible.                                       |
| Water-resistant                          | Yes                                                                                                      |
| Two-hand operation                       | No                                                                                                       |

## Dimensions

|              |          |
|--------------|----------|
| Connection A | 6 x 8 mm |
| G mm         | M 12 x 1 |
| L mm         | 32       |
| L1 mm        | 7        |
| L2 mm        | 6        |
| SW mm        | 14       |
| SW1 mm       | 14       |