

27KBTF19BPN Quick coupling with hose barb




Quick coupling double shut-off, hose barb 19mm (3/4), nominal diameter 10, <35 bar, brass nickel plated, seal NBR



Product description

1/2 universal industrial coupling with standard European profile for use with large pneumatic consumers. Coupling system with single-hand operation. UltraFlo valve for optimum flow and low pressure drop. The series stands out for its robust design (steel sleeve), extremely high flow and long service life even with the harshest use. The collar design minimises damage to the valve body.

More images

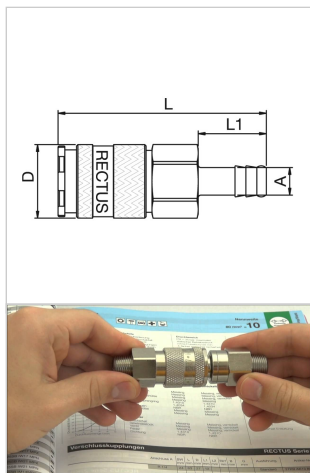

Product properties

Shut-off	Quick coupling Double Shut-Off
Connection	Hose barb 19mm LW(3/4")
Connection description	Hose barb 19mm LW(3/4")
Connection type	Hose barb
Suitable breath / respiratory protection	No
Seal	NBR
Seal description	Nitrite-butadiene rubber
Working pressure	35 bar maximum static working pressure with safety factor 4 to 1.
Pressure eliminator	No
Single-hand operation	Yes
Self-venting coupling	No
Flat-sealing	No
Mould coupling	No
Weight in kg	0,1616
Hydraulics	No
Ball locking	Yes
Material	Brass nickel plated
Material description	Brass CuZn39Pb3 2.0401 (completely)
Bore area in mm ²	80
Bore in mm	10
Surface	nickel plated
Pneumatics	Yes
Series	27
Series long	27KB
Safety locking system	No
Standard product	No
Pin lock	No
Working temperature	-20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) 0°C up to +316°C (FFKM) depending on the medium.
Ultra-FLO-valve	No
Vacuum suitable	No
Advantages	One-hand operation. Low pressure Drop. UltraFlo valve. The collar design minimises damage to the valve body.
Water-resistant	Yes
Material connection	Brass nickel plated
Material seal	Perbunan®
Material sleeve	Brass nickel plated
Material spring snap ring	stainless steel AISI 301
Material balls/pins	Stainless steel AISI 420
Material valve	Brass
Material valve body	Brass nickel plated
Two-hand operation	No

Dimensions

Connection A	19 mm
D mm	27
L mm	76
L1 mm	25
SW mm	24