

3091 06 10 Straight stud coupling

LF 3000 standard pneumatic, Self-sealing, straight stud coupling, Brass nickel plated, 6 mm - R1/8




Product description

In line connection of tubing to a threaded port. The passage of the fitting is closed when the tube is disconnected and restored in both directions when connected.

- solid construction,
- precoated thread ensuring direct sealing,
- full air flow,
- individual unit quality control a

More images

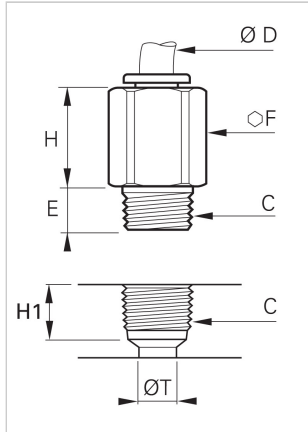

Product properties

Seal coating	PTFE
Weight in kg	0,015
Maximum working pressure in bar	10
max. temperature in °C	70
RoHS compliant	Yes
Vacuum resistance in mm Hg	755
Material seal	NBR
Material body	Brass nickel plated
Material non-return valve	Brass
Material toothed washer	Stainless steel

Dimensions

C	R1/8"
E	7,5
F	13
H	19,5
H1	9,5
ØD	6 mm
T	7,5