

## 3091 10 17 Straight stud coupling

LF 3000 standard pneumatic, Self-sealing, straight stud coupling, Brass nickel plated, 10 mm - R3/8




### Product description

In line connection of tubing to a threaded port. The passage of the fitting is closed when the tube is disconnected and restored in both directions when connected.

- solid construction,
- precoated thread ensuring direct sealing,
- full air flow,
- individual unit quality control a

### More images

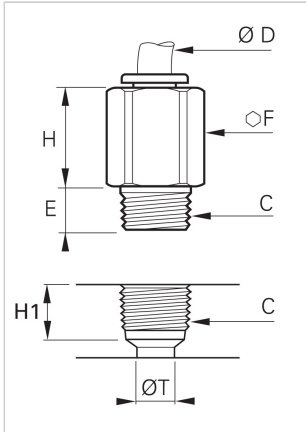

**Product properties**

|                                 |                     |
|---------------------------------|---------------------|
| Seal coating                    | PTFE                |
| Weight in kg                    | 0,034               |
| Maximum working pressure in bar | 10                  |
| max. temperature in °C          | 70                  |
| RoHS compliant                  | Yes                 |
| Vacuum resistance in mm Hg      | 755                 |
| Material seal                   | NBR                 |
| Material body                   | Brass nickel plated |
| Material non-return valve       | Brass               |
| Material toothed washer         | Stainless steel     |

**Dimensions**

|           |       |
|-----------|-------|
| <b>C</b>  | R3/8" |
| <b>E</b>  | 11,5  |
| <b>F</b>  | 17    |
| <b>H</b>  | 27,5  |
| <b>H1</b> | 14    |
| <b>ØD</b> | 10 mm |
| <b>T</b>  | 10    |