

## 3103 56 14 L-stud coupling


LF 3000 standard pneumatic, L-stud coupling, Engineered polymer, 2 x 1/4" - NPT1/4"



### Product description

In line connection of 2 tubes at a 90° angle with a male thread. Solid construction, compact, aesthetic and unobtrusive for better connection. Precoated thread ensuring direct sealing and full air flow. Individual unit quality control and dating in order to guarantee quality and traceability. Complies RoHS and ISO 14743.

### More images

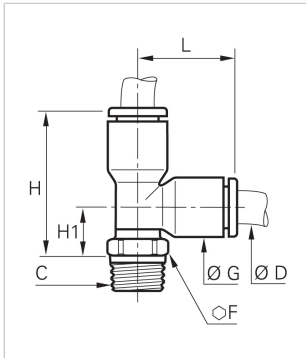

## Product properties

|                                 |                     |
|---------------------------------|---------------------|
| Special feature                 | schwenkbar          |
| Seal coating                    | PTFE                |
| Weight in kg                    | 0,015               |
| Maximum working pressure in bar | 20                  |
| max. temperature in °C          | 80                  |
| min. temperature in °C          | -20                 |
| RoHS compliant                  | Yes                 |
| Vacuum resistance in mm Hg      | 755                 |
| Material seal                   | NBR                 |
| Material body                   | Engineered polymer  |
| Material threaded fitting       | Brass nickel plated |
| Material toothed washer         | Stainless steel     |

## Dimensions

|    |         |
|----|---------|
| C  | NPT1/4" |
| F  | 14      |
| G  | 10,922  |
| H  | 28,448  |
| H1 | 10,414  |
| L  | 17,526  |
| ØD | 1/4"    |