

3112 06 13 Y-4 way-stud coupling


LF 3000 standard pneumatic, Y-4 way-stud coupling, Engineered polymer, 4 x 6 mm - R1/4



Product description

In-line pressure or flow distribution for 4 tubes connected to a threaded port. Can be fixed in position by the use of 2 screws. solid construction, aesthetic and unobtrusive for a better connection. Precoated thread ensuring direct sealing. Full air flow. Individual unit quality control and dating in order to guarantee quality and traceability. Complies RoHS and ISO 14743.

More images

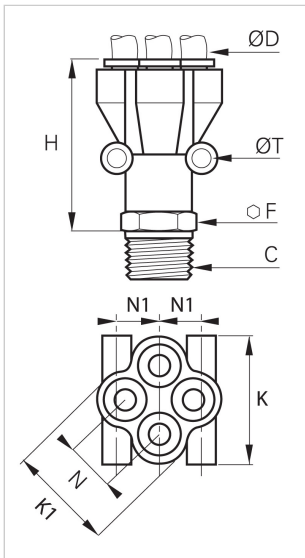

Product properties

Seal coating	PTFE
Weight in kg	0,047
Maximum working pressure in bar	20
max. temperature in °C	80
min. temperature in °C	-20
RoHS compliant	Yes
Vacuum resistance in mm Hg	755
Material seal	NBR
Material body	Engineered polymer
Material threaded fitting	Brass nickel plated
Material toothed washer	Stainless steel

Dimensions

C	R1/4"
F	19
H	57,5
K	31,5
K1	26,5
N	12
N1	10
ØD	6 mm
T	3,7