

## 3132 06 10 Y-4 way-stud coupling


LF 3000 standard pneumatic, Y-4 way-stud coupling, Engineered polymer, 4 x 6 mm - G1/8



### Product description

Dient der Druck- oder Durchfluss-Verteilung auf vier tube. Can be fixed in position by the use of two screws. solid construction. Full air flow. Individual unit quality control and dating in order to guarantee quality and traceability. Complies RoHS and ISO 14743.

### More images

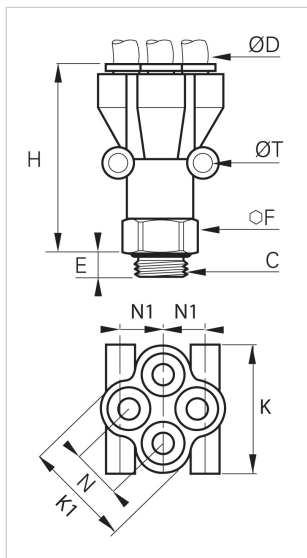

#### Product properties

|                                 |                     |
|---------------------------------|---------------------|
| Special feature                 | schwenkbar          |
| Weight in kg                    | 0,04                |
| Maximum working pressure in bar | 20                  |
| max. temperature in °C          | 80                  |
| min. temperature in °C          | -20                 |
| RoHS compliant                  | Yes                 |
| Vacuum resistance in mm Hg      | 755                 |
| Material seal                   | NBR                 |
| Material body                   | Engineered polymer  |
| Material threaded fitting       | Brass nickel plated |
| Material toothed washer         | Stainless steel     |

#### Dimensions

|    |       |
|----|-------|
| C  | G1/8" |
| E  | 5     |
| F  | 19    |
| H  | 53,5  |
| K  | 31,5  |
| K1 | 26,5  |
| N  | 12    |
| N1 | 10    |
| ØD | 6 mm  |
| T  | 3,7   |