

3132 06 13 Y-4 way-stud coupling


LF 3000 standard pneumatic, Y-4 way-stud coupling, Engineered polymer, 4 x 6 mm - G1/4



Product description

Dient der Druck- oder Durchfluss-Verteilung auf vier tube. Can be fixed in position by the use of two screws. solid construction. Full air flow. Individual unit quality control and dating in order to guarantee quality and traceability. Complies RoHS and ISO 14743.

More images

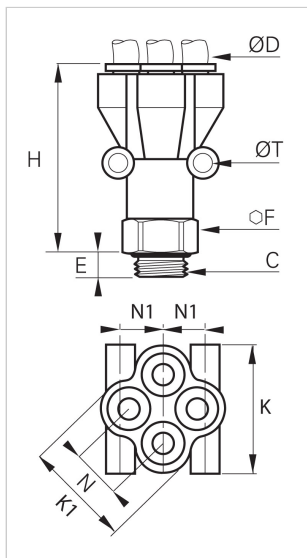

Product properties

Special feature	schwenkbar
Weight in kg	0,042
Maximum working pressure in bar	20
max. temperature in °C	80
min. temperature in °C	-20
RoHS compliant	Yes
Vacuum resistance in mm Hg	755
Material seal	NBR
Material body	Engineered polymer
Material threaded fitting	Brass nickel plated
Material toothed washer	Stainless steel

Dimensions

C	G1/4"
E	5,5
F	19
H	52,5
K	31,5
K1	26,5
N	12
N1	10
ØD	6 mm
T	3,7