

3181 06 19 Male stud coupling


LF 3000 standard pneumatic, male stud coupling internal hexagon headed, Brass nickel plated, 6 mm - M5x0,8



Product description

In line connection of tubing to a threaded port. Tightened on the top of the fitting with an Allen key to allow assembly in very tight spaces. solid construction, aesthetic and unobtrusive for a better connection. Full air flow. Individual unit quality control and dating in order to guarantee quality and traceability. Complies RoHS and ISO 14743.

More images

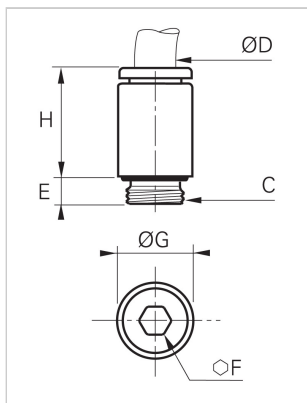

Product properties

Weight in kg	0,005
Maximum working pressure in bar	20
max. temperature in °C	80
min. temperature in °C	-20
RoHS compliant	Yes
Vacuum resistance in mm Hg	755
Material seal	NBR
Material body	Brass nickel plated
Material toothed washer	Stainless steel

Dimensions

C	M5x0,8
E	3,5
F	2,5
G	11
H	16,5
ØD	6 mm