

3300 04 00 Modular plug-in connector


LF 3000 standard pneumatic, Modular plug-in connectors, Engineered polymer, 10 x 4 mm



Product description

Modular connection of 2 nests of tubes. Connection and disconnection of the 2 nests of tubes can be done in one operation. Combined male and female modules limit the number of components.. Easy customization to prevent mistakes. Suitable for bulkhead assembly, on panels or in cabinets.

More images

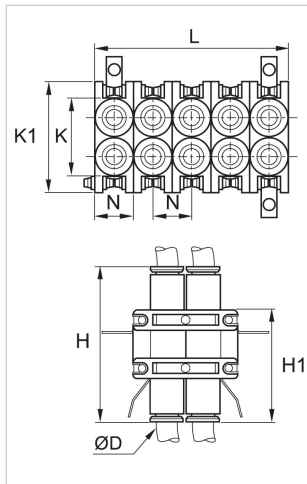

Product properties

Weight in kg	0,078
Maximum working pressure in bar	10
max. temperature in °C	80
min. temperature in °C	-20
RoHS compliant	Yes
Material seal	NBR
Material body	Engineered polymer
Material toothed washer	Stainless steel

Dimensions

B	21
H	40,5
H1	29,5
K	32
K1	20
L	55
L1	22
L2	6
N	11
ØD	4 mm