

3600 06 00 Cartridge

Carstick cartridges, metal cartridge for liquids and gases - one-piece cartridge, Brass nickel plated chemical fda brass, 6 mm




Product description

Connection of tubing in a customised assembly block with cavities prepared for the insertion of cartridges. Advantages in use of LF3600 cartridges:

- threaded hole unnecessary
- compact installation through reduced dimensions
- quick mounting and unmounting of the tube

Individual unit quality control and dating in order to guarantee quality and traceability. conforms to FDA standard and RoHS.

More images

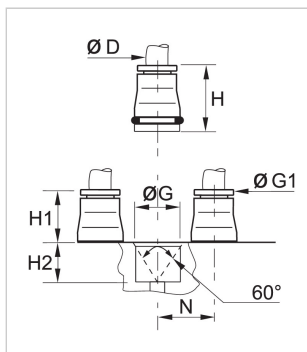

Product properties

Weight in kg	0,009
Maximum working pressure in bar	30
max. temperature in °C	150
min. temperature in °C	-20
RoHS compliant	Yes
Vacuum resistance in mm Hg	755
Material seal ring	Brass nickel plated chemical fda brass
Material seal	FKM
Material body	Brass nickel plated chemical fda brass
Material release button	Brass nickel plated chemical fda brass

Dimensions

G	12,1
G1	10
H	19
H1	10,5
H2	8,5
N	13,5
ØD	6 mm