

## 3600 14 00 Cartridge

Carstick cartridges, metal cartridge for liquids and gases - one-piece cartridge, Brass nickel plated chemical fda brass, 14 mm




### Product description

Connection of tubing in a customised assembly block with cavities prepared for the insertion of cartridges. Advantages in use of LF3600 cartridges:

- threaded hole unnecessary
- compact installation through reduced dimensions
- quick mounting and unmounting of the tube

Individual unit quality control and dating in order to guarantee quality and traceability. conforms to FDA standard and RoHS.

### More images

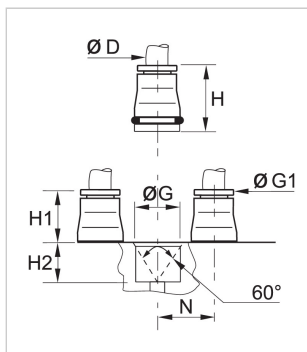

## Product properties

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Weight in kg                    | 0,031                                  |
| Maximum working pressure in bar | 30                                     |
| max. temperature in °C          | 150                                    |
| min. temperature in °C          | -20                                    |
| RoHS compliant                  | Yes                                    |
| Vacuum resistance in mm Hg      | 755                                    |
| Material seal ring              | Brass nickel plated chemical fda brass |
| Material seal                   | FKM                                    |
| Material body                   | Brass nickel plated chemical fda brass |
| Material release button         | Brass nickel plated chemical fda brass |

## Dimensions

|           |       |
|-----------|-------|
| <b>G</b>  | 22    |
| <b>G1</b> | 20    |
| <b>H</b>  | 28,5  |
| <b>H1</b> | 16,5  |
| <b>H2</b> | 12    |
| <b>N</b>  | 25    |
| <b>ØD</b> | 14 mm |