


## 1100P12R00 Straight polyamide-hose

Straight polyamide-hose, flame retardant, outer diameter 12 mm, inner diameter 10 mm, clear, length 100 m

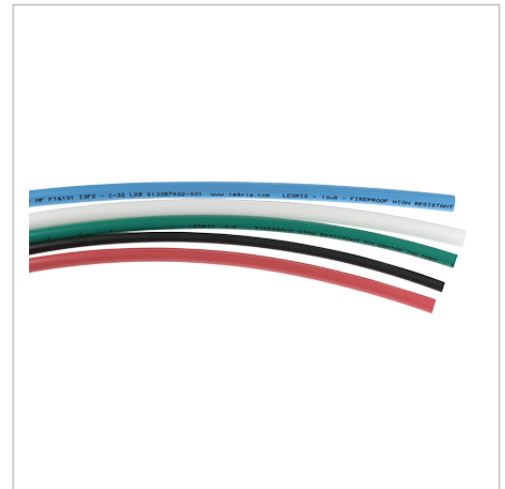


### Product description

This tubing ensures safety and lifespan of all on-board railways equipment, in compliance with NF F16101 and Pr EN 45545 standards.

This range offers a new trade-off for all industrial applications: UL 94V0 conformity and economical alternative for equipment, combining technical advantages of both rigid and semi-rigid polyamide tubing. Highly resistant to flames, sparks and UV. It guarantees health protection thanks to non-toxic smoke resulting from burning.

In 5 colours available, from 4 to 12 mm.

### More images

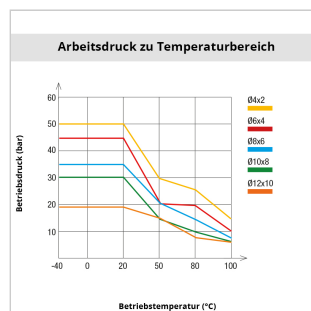

**Product properties**

|                               |                        |
|-------------------------------|------------------------|
| <b>Colour</b>                 | Uncoloured             |
| <b>Weight in kg</b>           | 3,716                  |
| <b>Material</b>               | FEUERHEMMENDES PA-ROHR |
| <b>max. temperature in °C</b> | 100                    |
| <b>min. temperature in °C</b> | -40                    |
| <b>RoHS compliant</b>         | Yes                    |
| <b>Hose length</b>            | 100 m                  |

**Dimensions**

|                       |       |
|-----------------------|-------|
| <b>Outer diameter</b> | 12 mm |
| <b>Bend radius</b>    | 92    |
| <b>Inner diameter</b> | 10 mm |
| <b>Inner diameter</b> | 10 mm |