


0694 10 13 Push-in-fitting


Push-in-Fitting with protection spring, 10 mm - G1/4

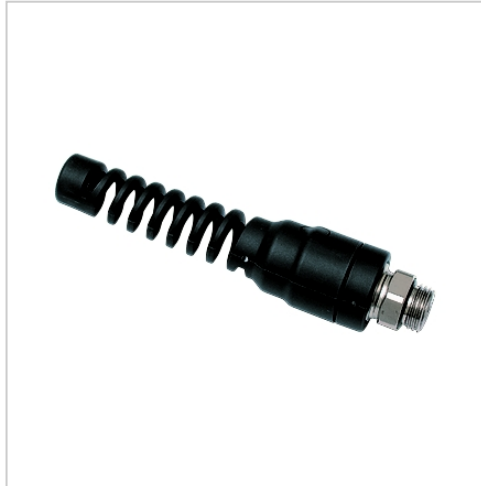

Product description

Guarantees long-term connection thanks to the retention of the tube by the protection ring.
Enables tube length adjustment or disconnection without thread disassembly thanks to the push-in connection design of the protection spring.

More images



Product properties

Weight in kg	0,062
Maximum working pressure in bar	20
max. temperature in °C	60
min. temperature in °C	-20
RoHS compliant	Yes
Material seal	NBR
Material spring	Engineered polymer
Material body	Brass nickel plated
Material toothed washer	Stainless steel

Dimensions

C	G1/4"
E	6,5
F	18
G	24
L	106,5
ØD	10 mm