


0694 12 17 Push-in-fitting


Push-in-Fitting with protection spring, 12 mm - G3/8

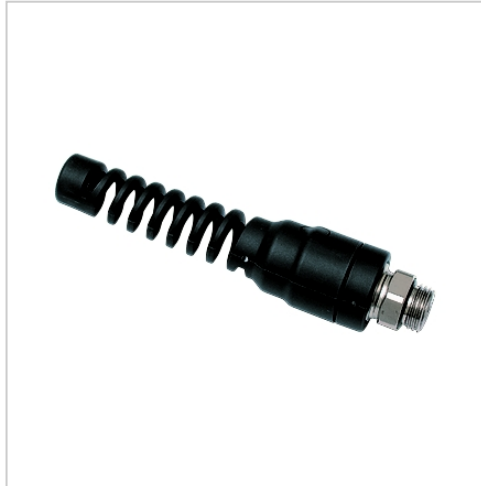

Product description

Guarantees long-term connection thanks to the retention of the tube by the protection ring.
Enables tube length adjustment or disconnection without thread disassembly thanks to the push-in connection design of the protection spring.

More images



Product properties

Weight in kg	0,08
Maximum working pressure in bar	20
max. temperature in °C	60
min. temperature in °C	-20
RoHS compliant	Yes
Material seal	NBR
Material spring	Engineered polymer
Material body	Brass nickel plated
Material toothed washer	Stainless steel

Dimensions

C	G3/8"
E	7,5
F	20
G	29,5
L	126
ØD	12 mm