

0436 13 21 Ball valve

Ball valves Brass, 3/2-way ball valve with threaded exhaust, lockable in three positions, Brass nickel plated, NW 13, G1/2




Product description

In-line ball valve for opening and closing a fluid system. It is possible to add a padlock for securing the ball valve and thus preventing potentially dangerous, unwanted operation.

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration

More images

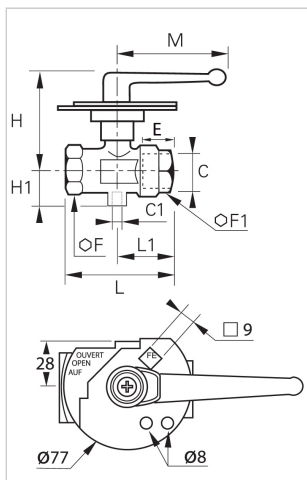

Product properties

Weight in kg	0,5
Maximum working pressure in bar	40
max. temperature in °C	80
min. temperature in °C	-40
Bore in mm	13
RoHS compliant	Yes
Material seal	NBR
Material body	Brass nickel plated
Material lock plate	Galvanized steel
Material stem	Brass, Brass nickel plated
Material plug sockets O-ring	NBR

Dimensions

C	G1/2"
C1	G1/8"
E	15
F	27
F1	27
H	60
H1	24,5
L	67,5
L1	34,5
M	69