

0436 18 27 Ball valve

Ball valves Brass, 3/2-way ball valve with threaded exhaust, lockable in three positions, Brass nickel plated, NW 18, G3/4




Product description

In-line ball valve for opening and closing a fluid system. It is possible to add a padlock for securing the ball valve and thus preventing potentially dangerous, unwanted operation.

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration

More images

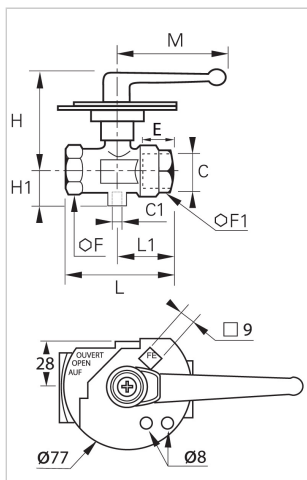

Product properties

Weight in kg	0,85
Maximum working pressure in bar	40
max. temperature in °C	80
min. temperature in °C	-40
Bore in mm	18
RoHS compliant	Yes
Material seal	NBR
Material body	Brass nickel plated
Material lock plate	Galvanized steel
Material stem	Brass, Brass nickel plated
Material plug sockets O-ring	NBR

Dimensions

C	G3/4"
C1	G1/4"
E	16,5
F	32
F1	38
H	69,5
H1	33
L	80
L1	39,5
M	108