

0437 18 27 Ball valve

Ball valves Brass, 3/2-way ball valve with threaded exhaust, lockable in three positions, Brass nickel plated, NW 18, G3/4




Product description

In-line ball valve for opening and closing a fluid system. It is possible to add a padlock for securing the ball valve and thus preventing potentially dangerous, unwanted operation .

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

More images

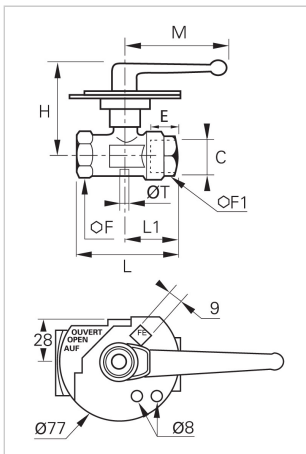

Product properties

Weight in kg	0,82
Maximum working pressure in bar	40
max. temperature in °C	80
min. temperature in °C	-40
Bore in mm	18
RoHS compliant	Yes
Material seal	NBR
Material body	Brass nickel plated
Material seat seal	NBR
Material lock plate	Galvanized steel
Material lever	Zamac
Material stem	Brass, Brass nickel plated
Material plug sockets O-ring	NBR

Dimensions

C	G3/4"
E	16,5
F	32
F1	38
H	69,5
L	80
L1	39,5
M	108,5
T	2,5