

## 4832 25 34 Ball valve



Ball valves Stainless steel, 2/2-way ball valve with fixing plate, three-piece, Stainless steel 316I, NW 25, G1



### Product description

Connection of pneumatic or electric actuators due to the special sub-base. Excellent chemical resistance to aggressive fluids and environments. Good pressure resistance.

### More images

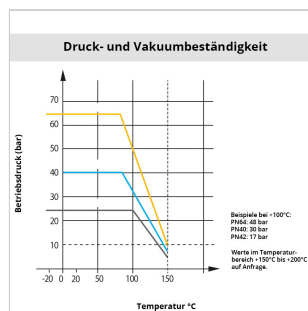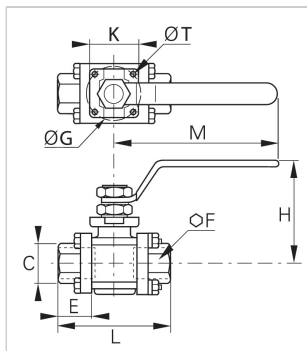

## Product properties

|                            |                      |
|----------------------------|----------------------|
| Weight in kg               | 1,035                |
| max. temperature in °C     | 150                  |
| min. temperature in °C     | -20                  |
| Bore in mm                 | 25                   |
| Nominal pressure in bar    | 40                   |
| RoHS compliant             | Yes                  |
| Material seal              | PTFE                 |
| Material adjusting spindle | Stainless steel      |
| Material body              | Stainless steel 316l |
| Material lever             | Stainless steel      |
| Material stem              | Stainless steel 316l |
| Material union nut         | Stainless steel      |

## Dimensions

|   |       |
|---|-------|
| C | G1"   |
| E | 27    |
| F | 41    |
| G | 42    |
| H | 78,5  |
| K | 42    |
| L | 92    |
| M | 174,5 |
| T | 6     |