

4832 50 48 Ball valve



Ball valves Stainless steel, 2/2-way ball valve with fixing plate, three-piece, Stainless steel 316I, NW 50, G2



Product description

Connection of pneumatic or electric actuators due to the special sub-base. Excellent chemical resistance to aggressive fluids and environments. Good pressure resistance.

More images

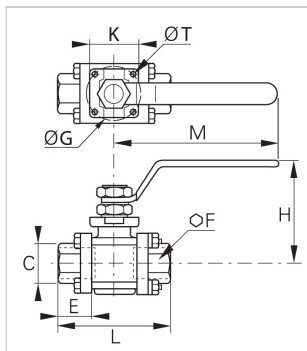

Product properties

Weight in kg	3,14
max. temperature in °C	150
min. temperature in °C	-20
Bore in mm	50
Nominal pressure in bar	25
RoHS compliant	Yes
Material seal	PTFE
Material adjusting spindle	Stainless steel
Material body	Stainless steel 316l
Material lever	Stainless steel
Material stem	Stainless steel 316l
Material union nut	Stainless steel

Dimensions

C	G2"
E	36
F	70
G	50
H	107
K	50
L	136
M	250,5
T	6,5