

## 6402 04 10 Ball valve

Ball valves Brass, 2/2-way ball valve for screw fixing, Brass nickel plated, NW 4, G1/8




### Product description

Panel-mountable. In-line ball valve for closing fluid systems with a simple quarter turn of the handle.

- suitable for use with steel tube
- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

### More images

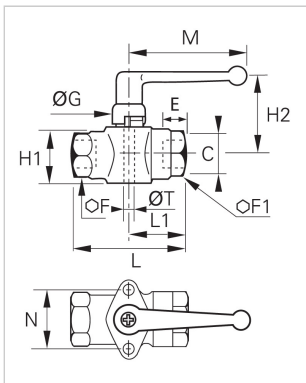

## Product properties

|                                 |                            |
|---------------------------------|----------------------------|
| Weight in kg                    | 0,132                      |
| Maximum working pressure in bar | 40                         |
| max. temperature in °C          | 80                         |
| min. temperature in °C          | -40                        |
| Bore in mm                      | 4                          |
| RoHS compliant                  | Yes                        |
| Material seal                   | NBR                        |
| Material body                   | Brass nickel plated        |
| Material seat seal              | NBR                        |
| Material lever                  | Zamac                      |
| Material stem                   | Brass, Brass nickel plated |
| Material plug sockets O-ring    | NBR                        |

## Dimensions

|    |       |
|----|-------|
| C  | G1/8" |
| E  | 8     |
| F  | 14    |
| F1 | 14    |
| G  | 18    |
| H1 | 18    |
| H2 | 30    |
| L  | 44    |
| L1 | 25    |
| M  | 48    |
| N  | 25    |
| T  | 4x70  |