

6402 20 27 Ball valve

Ball valves Brass, 2/2-way ball valve for screw fixing, Brass nickel plated, NW 20, G3/4




Product description

Panel-mountable. In-line ball valve for closing fluid systems with a simple quarter turn of the handle.

- suitable for use with steel tube
- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

More images

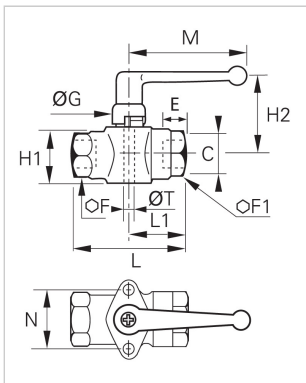

Product properties

Weight in kg	0,83
Maximum working pressure in bar	40
max. temperature in °C	80
min. temperature in °C	-40
Bore in mm	20
RoHS compliant	Yes
Material seal	NBR
Material body	Brass nickel plated
Material seat seal	NBR
Material lever	Zamac
Material stem	Brass, Brass nickel plated
Material plug sockets O-ring	NBR

Dimensions

C	G3/4"
E	16,5
F	32
F1	38
G	27
H1	44
H2	52
L	80
L1	39
M	108
N	43
T	8x125