


Air Saver ASV2000-AA-17

Compressed air saving, female thread G 3/8", 0 – 8 bar, flow rate 2.000 l/min

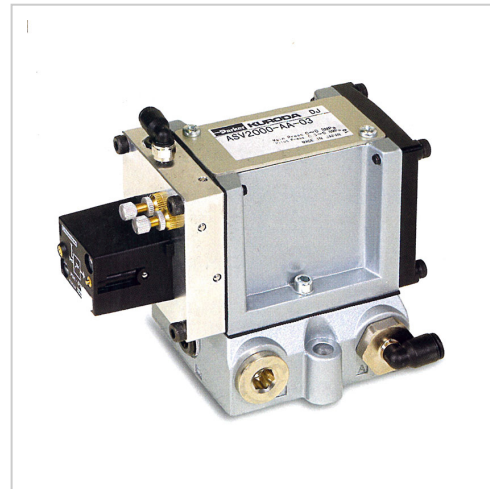

Product description

The Air Saver generates a pulsating compressed air flow. The fast ON / OFF switching reduces the compressed air consumption while increasing the efficiency of many blowing processes.



As you can clearly see in the application video, the pressure spikes increase the blowing efficiency while reducing the flow rate.

The Air Saver is only installed in the compressed air circuit and is ready for operation without modification or programming of your system.

Significant benefits can be achieved with an Air Saver. The proportion of blown air is almost 50% of the compressed air used in factories. With its switching valve technology, the Air Saver can reduce air consumption by up to 50%!

- Huge savings in air consumption.
- Reduced compressor power consumption.
- Reduced CO2 emissions.
- Large contribution to energy saving targets.

More images



Product properties

Connection	Female thread G 3/8"
Working pressure	0 – 8 bar
Flow rate in l/min	2000
Function	normally closed
Weight in kg	0,86
max. inlet pressure	8 bar
Medium suitability	Unlubricated air
Voltage	No electrical energy required
Working temperature	-5°C to +50°C

Dimensions