

## 3091 - Self-sealing, stud fittings

LF 3000 standard pneumatic, Self-sealing, stud fittings, Brass nickel plated




### Product description

In line connection of tubing to a threaded port. The passage of the fitting is closed when the tube is disconnected and restored in both directions when connected.

- solid construction,
- precoated thread ensuring direct sealing,
- full air flow,
- individual unit quality control a

### More images

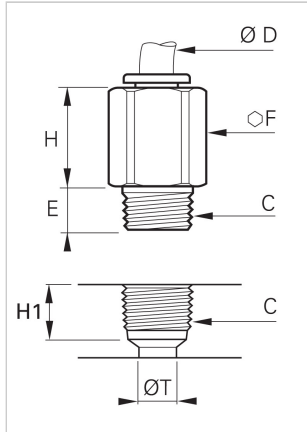

**Product properties**

|                                 |                     |
|---------------------------------|---------------------|
| Seal coating                    | PTFE                |
| Maximum working pressure in bar | 10                  |
| max. temperature in °C          | 70                  |
| RoHS compliant                  | Yes                 |
| Vacuum resistance in mm Hg      | 755                 |
| Material seal                   | NBR                 |
| Material body                   | Brass nickel plated |
| Material non-return valve       | Brass               |
| Material toothed washer         | Stainless steel     |

**Dimensions**