


1025U..K - Flexible polyurethane polyether tubings, anti-spark


Flexible polyurethane polyether tubings, anti-spark, length 25 m

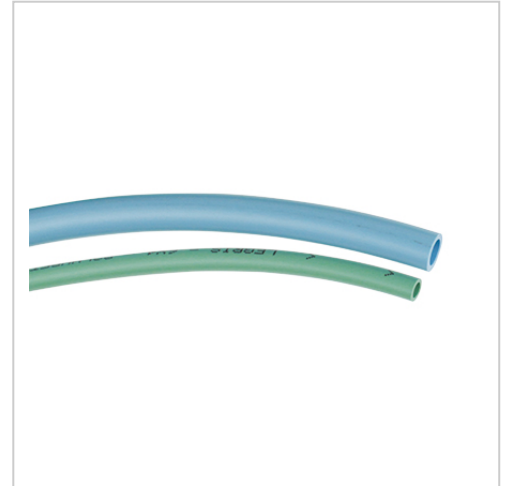

Product description

Used for welding applications. Single layer, push-in connection with LF 3600 fittings.

More images



Product properties

Material	PUER - UL94
max. temperature in °C	70
min. temperature in °C	-20
RoHS compliant	Yes

Dimensions