


1050T..P - Fluoropolymer tubings (PFA)

Fluoropolymer tubings (PFA), length 50 m

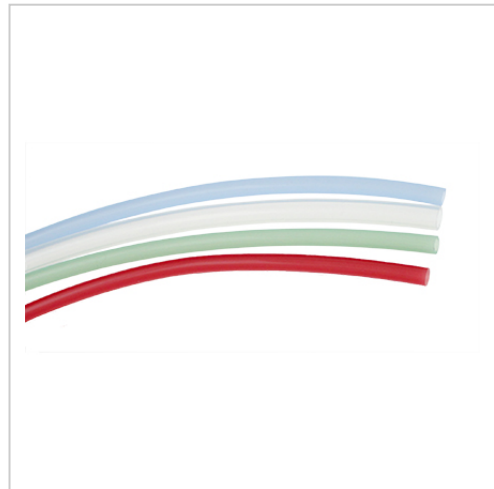

Product description

Our range of PFA tubing covers a broad range of working temperatures, from cryogenic to extremely hot (+260°C) and of pressures (up to 35 bar) and combines transparency with the lowest gas and fluid permeability.

This tubing improves system security and prevents the risks of fluid and gas leaks while facilitating visual inspection of contaminants or flow disruption.

The diameters 10 and 12 mm in coloured versions are available upon request only.

More images

Product properties

max. temperature in °C	260
min. temperature in °C	-196
RoHS compliant	Yes

Dimensions