

0436 - 3/2-way ball valves with threaded exhaust, lockable in three positions

Ball valves Brass, 3/2-way ball valves with threaded exhaust, lockable in three positions




Product description

In-line ball valve for opening and closing a fluid system. It is possible to add a padlock for securing the ball valve and thus preventing potentially dangerous, unwanted operation.

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration

More images

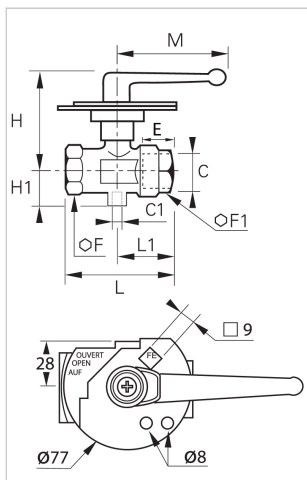

Product properties

Material	Brass nickel plated
max. temperature in °C	80
min. temperature in °C	-40
RoHS compliant	Yes
Material seal	NBR
Material body	Brass nickel plated
Material lock plate	Galvanized steel
Material stem	Brass, Brass nickel plated
Material plug sockets O-ring	NBR

Dimensions