

## 0438 - 3/2-way angle ball valves, lockable in three positions

Ball valves Brass, 3/2-way angle ball valves, lockable in three positions




### Product description

For opening and closing a fluid system. It is possible to add a padlock for securing the ball valve and thus preventing potentially dangerous, unwanted operation .

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

### More images

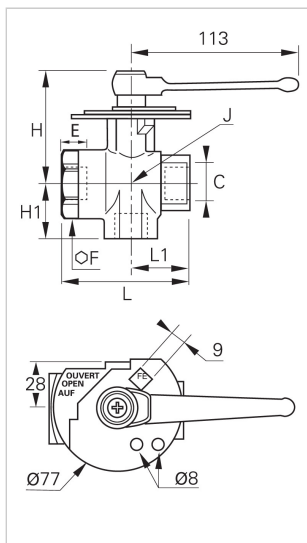

## Product properties

|                              |                            |
|------------------------------|----------------------------|
| Material                     | Brass nickel plated        |
| max. temperature in °C       | 80                         |
| min. temperature in °C       | -40                        |
| RoHS compliant               | Yes                        |
| Material seal                | NBR                        |
| Material body                | Brass nickel plated        |
| Material seat seal           | NBR                        |
| Material lock plate          | Treated steel              |
| Material lever               | Zamac                      |
| Material stem                | Brass, Brass nickel plated |
| Material plug sockets O-ring | NBR                        |

## Dimensions