


PSR38SX Progressive stop ring

Tube outside diameter 38 mm, galvanized steel, heavy series

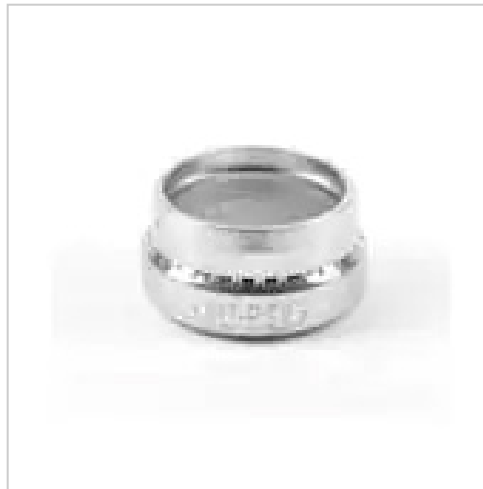

Product description

Ermeto DIN fitting components for high pressure hydraulic tube fittings are indispensable items in order to build up a complete fitting series (EO-PSR, EO-2, EO2-FORM). The FM EO-2 functional nut is available with sealing NBR or sealing FKM.

Markets:

- Automotive
- Defense
- Energy
- Environment
- Industrial
- Infrastructure
- Machine Tools
- Materials Handling
- Mobile
- Oil and Gas
- Power Generation
- Process
- Transportation
- Water


Applications:

- Suitable for general hydraulic applications.

Features/ benefits:

- Steel and Stainless steel fittings have a high corrosion resistance to aggressive media and environmental influences.
- Depending on the specific requirements, the FM EO-2 functional nut can be delivered with sealing NBR or sealing FKM. This feature increase the range of applications.

More images



Product properties

Series	Light
Specifications met	DIN ISO 8434
Form	Progressive stop ring
Material	Galvanized steel
Maximum working pressure in bar	420
Rohr Außendurchmesser	38 mm
Working temperature	-40°C up to 250°C

Dimensions

L2	13
ØD1	38