


EMA3/10X1ED71 SensoControl Test Point

Testing point EMA3, male thread M 10 x 1, form B, stainless steel, ED-seal FKM

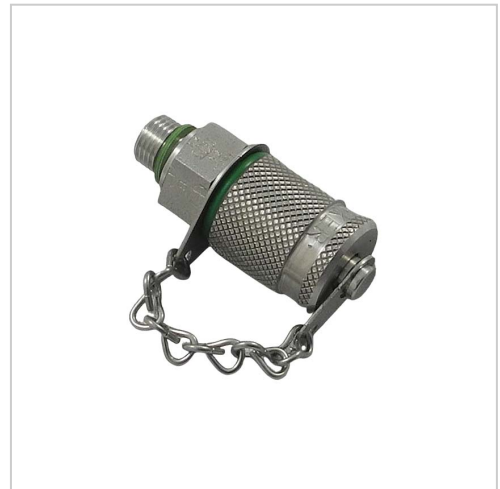


Product description

- For pressure monitoring and control of high & low pressure and vacuum systems.
- For venting cylinders and hydraulic systems.
- For sampling at high, low and negative pressure.

Advantages

- Leak-free sealing of the connection before valve is opened
- Robust, reliable construction with small dimensions
- Easy handling
- Simple connection of measuring, testing and switching devices
- Coupling possible under pressure up to 400 bar for types with screw coupling
- Nominal pressures up to 630 bar
- Vibration-proof metal protection cap

More images



Product properties

Seals	Eolastic seal
Form	B
Weight in kg	0,094
Material	Stainless steel
Maximum working pressure in bar	400
max. temperature in °C	+250°C steel, +400°C stainless steel
min. temperature in °C	-40°C steel, -60°C stainless steel
Optional accessories	Pre-installed nuts and EO-PSR cutting rings, Pre-installed EO-2 functional nut
Series	3
Series long	3
Material seal	FKM
Additional information	Specification met: DIN ISO 8434

Dimensions

Connection 1	Male thread
Connection 2	M16 test point connector
Size connection 1	Male thread M 10 x 1
Size connection 2	M 16x2
L1	40
L2	8
ØD1	14 mm
S1	17
T1	M 10×1,0